



SMC

Communications Solutions
www.smc-comms.com


Pneumatic Mast Trailers

Fully galvanised, two wheeled trailer complete with:

- Mast tilting frame (with winch where necessary)
- Aluminium chequer plate deck
- Telescopic outriggers with wind-down legs
- Overrun brakes with hand brake
- 50mm ball hitch with safety stop and jockey wheel
- 7 pin trailer plug
- Regulation lights, indicators and reflectors on tailboard
- Spare wheel and wrench supplied as standard



**High Level Photography...
Communications...
Environmental Monitoring...**

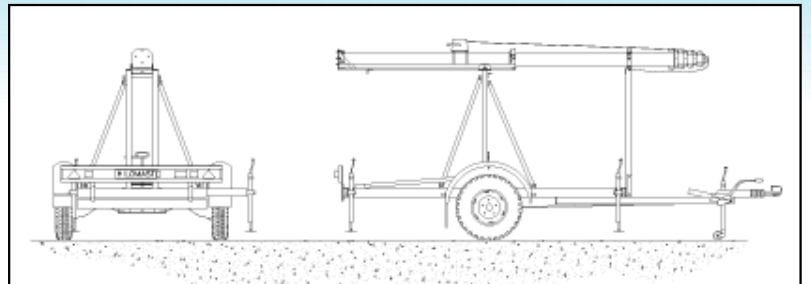

More Information:

SMC manufacture a standard range of on and off road trailers, capable of supporting masts up to 30 metres high to their maximum wind speed capability. We also manufacture special units tailored for individual projects, with different towing arrangements.

All standard models can be towed by a car, preferably 1600cc or more, with a 50mm dia. ball hitch.

- Rugged Construction
- Pneumatically Operated Masts

The Hilomast range that we recommend for fitting to trailers is as follows.

Trailer NL/SHORT

Designed for all masts up to 3 metres retracted, maximum 14 metres extended, except NY series.
Trailer dimensions : 2.85m. X 1.5m. X 1.37m. high.

Trailer NL/LONG

For longer NK and NL masts up to 22 metres.
Dimensions : 4.8m. X 1.85m. X 1.99m. high.
Available in rugged construction for off-road usage.

Trailer NX/LONG

For longer NX masts up to 30 metres.
Dimensions : 4.8m. X 1.85m. X 2.03m. high.
Available in rugged construction for off-road usage.



South Midlands Communications Ltd. SM House, School Close,
Chandlers Ford, Industrial Estate, Eastleigh, Hampshire, SO53 4BY ENGLAND
Tel: +44 (0)23 8024 6200 - Fax: +44 (0)23 8024 6206 - Email: sales@smc-comms.com